

# Switches

## Standard Family Code LTHH10021EA\*3



### Description

Contactor single interruption in air, electromagnetic control by starter power system plus saving resistor. Single state function.  
Reference Standard IEC 60077, IEC 61992 and IEC 60947.

Type	LTE 2-600
Number of Poles	1 NO
Mounting Position	Horizontal - Vertical <sup>1</sup>
Control Voltage Rating U <sub>c</sub> [Vdc]	24 - 36 - 48 - 72 - 110 <sup>1</sup>
Auxiliary Contact Blocks	3 x (1 NO + 1 NC)
Block Type	PBX
Arc chute Material	Ceramic
Main Contacts tips Material	S6
Arcing Contacts tips Material	-
Electric Diagram	SC27219
Layout Drawing	D48052

<sup>1</sup> To be specified in order phase.


### Electrical Characteristics

Rated Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	900 / 1800 <sup>1</sup>
Max Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	2000
Rated Insulation Voltage [V]	4000
Conventional Free Air Thermal Current [A] at 40°C <sup>2</sup>	900
Conventional Free Air Thermal Current [A] at 75°C <sup>2</sup>	800
DC-Rated Operational Current (τ=15ms) [A]	
1800V	500
900V	1050
DC-Maximum Breaking Capacity (τ=5ms) [A]	
1800V	650
900V	1400
AC-Maximum Breaking Capacity (cosφ=0,8; 50Hz) [A]	
1800V	1000
900V	1900
Component Category / Operational Frequency Class	A2 / C3
Short Circuit Withstand Capacity for 5ms [kA]	16
Critical Current Range [A]	< 6 (U > 1500V <sub>dc</sub> )
Fault Making Capacity [kA]	9.6
Blow Out Circuit Type	Indirect

<sup>2</sup> Device cabled according IEC 60947

Minimum clearances [mm] from:				
Rated Operational Voltage	X	Y	Z	
900V	Metal Parts	120	50	50
	Plastic Parts	50	30	30

Minimum clearances [mm] from:				
Rated Operational Voltage	X	Y	Z	
1800V	Metal Parts	120	50	50
	Plastic Parts	50	30	20

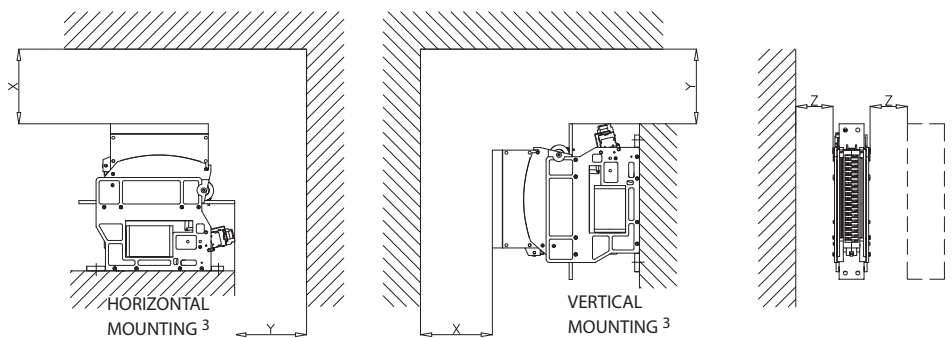

<sup>3</sup> OTHER MOUNTING POSITIONS NOT ALLOWED



Microelettrica Scientifica

# Switches

Standard Family Code  
LTHH10021EA\*3

## Mechanical Characteristics

Mechanical Endurance (cycles)	2x10 <sup>6</sup>
Shock and Vibrations (IEC61373)	Cat.1 - Class B
Weight [kg]	13

## Control Circuit

Control Voltage Range	0.7U <sub>c</sub> ÷ 1.25U <sub>c</sub>
Power Consumption (U <sub>c</sub> and T = 20°C) at Pick Up - when Holding [W]	300 - 50
Mechanical Operation Time (U <sub>c</sub> and T = 20°C) when Closing - Opening [ms]	100 - 45
Time Constant (L/R) at Pick Up - when Holding [ms]	20 - 36
Electrical Connections	Fast-On 6.35x0.8mm

## Auxiliary Contacts

Tips material	Silver Alloy
Rated Operational Voltage [V <sub>ac</sub> / V <sub>dc</sub> ]	250
Rated Current [A]	10
Minimum Switching Current at 16V <sub>dc</sub> [mA] <sup>4</sup>	20
Electrical Connections	Fast-On 6.35x0.8mm

## Environmental Conditions

Stock Temperature Range	-50°C ÷ +85°C
Operational Temperature Range	Tx (-50°C ÷ +75°C) <sup>5</sup>
Pollution Degree - Overvoltage Category (EN 50124-1)	PD3 - OV3
Max Altitude without Performance Derating [m]	2000

<sup>4</sup> In clean and dry conditions

<sup>5</sup> In according to IEC50125-1

